




# Safe-T-Stik Product Line

## Models, Key Features & Best Uses

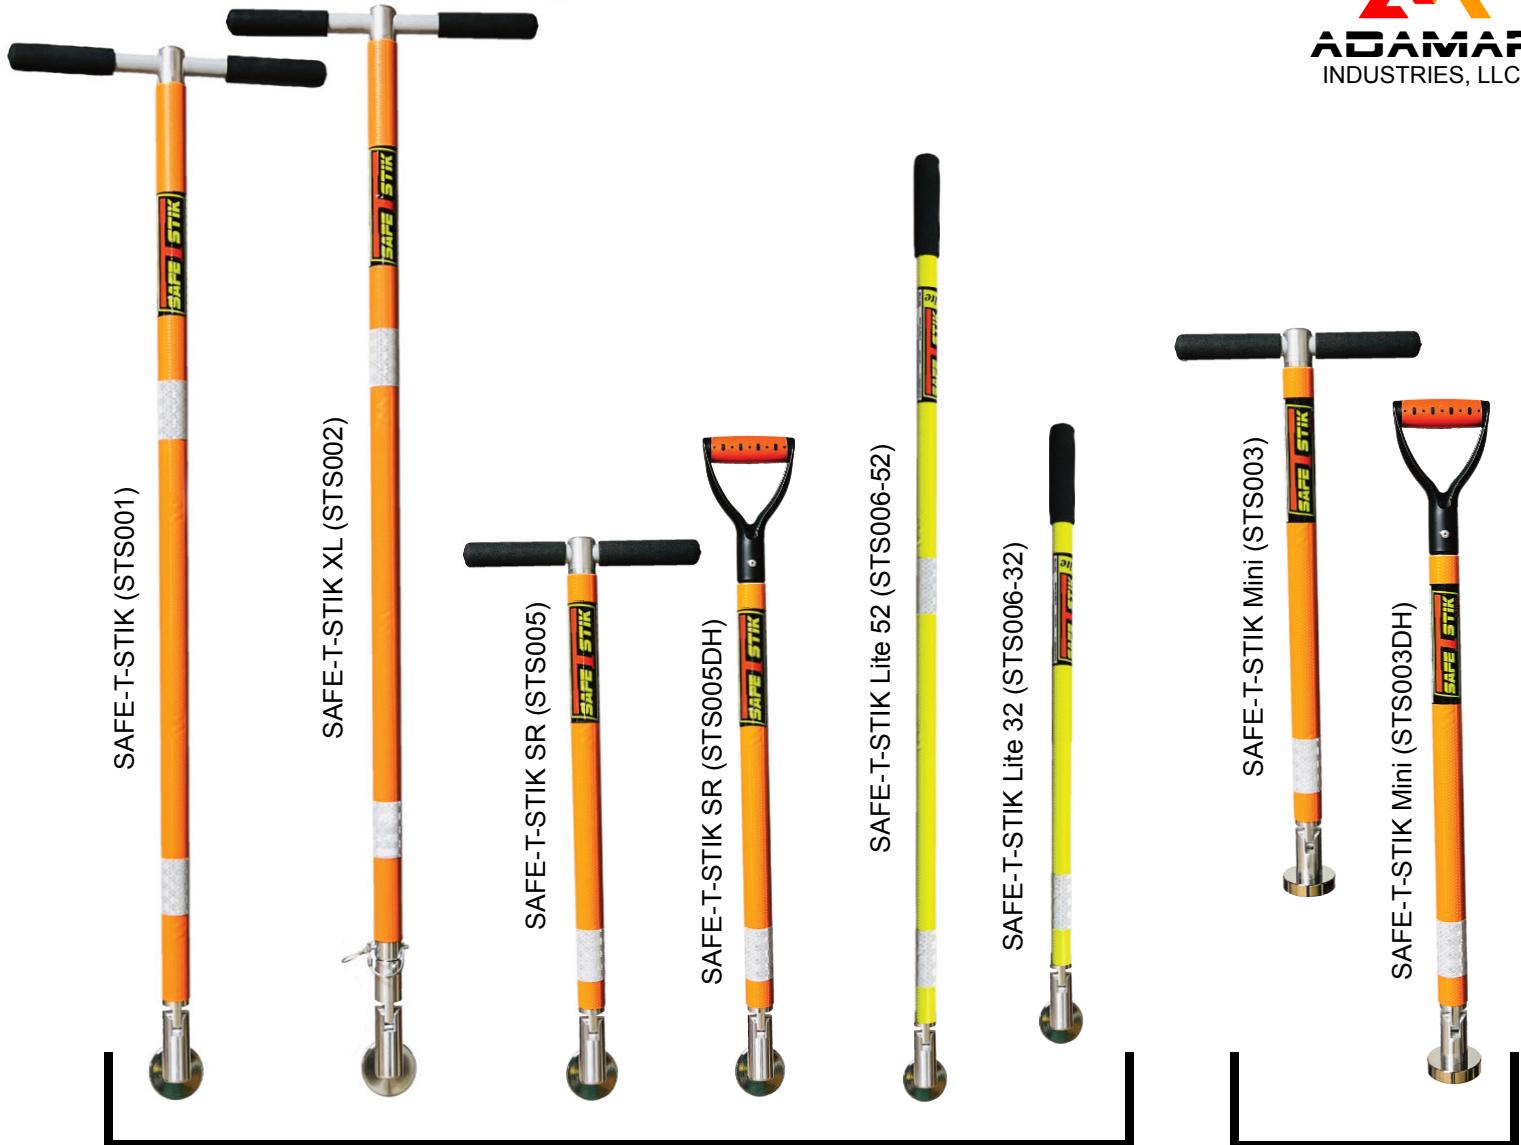

### SUSPENDED LOAD CONTROL, GUIDING & POSITIONING

The above Safe-T-Stik models are the perfect choice when it comes to safe and precise suspended load control and positioning. Choose fixed length, extendable, t-handle, d-handle or light weight straight grip. The knuckle design used on these products is specifically designed for push/pull load control and **not intended for lifting**.

### LIFTING & PULLING

Safe-T-Stik Mini is designed to lift up or pull out small steel covers, lids or other objects. It can also be used to hold & retrieve.



Handle Rotates 180°



Durable, abrasion resistant, lightweight non-slip tool handle with high visibility reflective bands.





# Magnetic No Touch Safety Tools

For Suspended Load Control, Positioning & Guiding



## SAFE-T-STIK

**Guide and position suspended loads with Safety, Precision and Control.** Keep employees safer by keeping their hands, feet and body out of the danger zone and away from crush and pinch points. Safe-T-Stik enables push/pull control and freedom to move with the suspended load.

### FEATURES

- Lightweight & strong
- Rigid, push & pull control
- Adjustable t-handle
- Articulation: 360° rotation, 180° pivot
- Easy to attach & release magnet
- Bright orange color
- Non-slip, abrasion resistant tool handle
- Reflective bands
- Made in USA



### SPECS

**Part # STS001**  
Length: Fixed, 54"  
Weight: 6.5 LBS  
Handle: Adjustable  
Magnet Strength: 550 LBS  
Package Weight: 8 LBS  
Package Size: 61" x 6" x 6"

U.S. Patent No. 9,975,254





# Magnetic No Touch Safety Tools

For Suspended Load Control, Positioning & Guiding



## SAFE-T-STIK XL

Reach further with the **SAFE-T-STIK XL**. Extend your reach from 58" up to 90" in seconds. This is the best option for operations that require longer reach, like moving and positioning trench boxes, trench shields, large parts, equipment, assemblies and more. Weighing in at only 8.5 LBS, this tool is lightweight and easy to use. SAFE-T-STIK XL gives you the flexibility you need in any work environment.



### FEATURES

- Lightweight & strong
- Rigid, push & pull control
- Adjustable length (extends)
- Adjustable t-handle
- Articulation: 360° rotation, 180° pivot
- Easy to attach & release magnet
- Bright orange color
- Non-slip, abrasion resistant tool handle
- Reflective bands
- Made in USA

*Adjustable Solid Fiberglass Rod Extends & Locks in 3 Positions.*

### SPECS

**Part # STS002**  
Length: Adjustable, 58" - 90"  
Weight: 8.5 LBS  
Handle: Adjustable  
Magnet Strength: 550 LBS  
Package Weight: 10 LBS  
Package Size: 61" x 6" x 6"

U.S. Patent No. 9,975,254





# Magnetic No Touch Safety Tools

For Lifting Out, Pulling Up & Holding



## SAFE-T-STIK Mini

With over 550 LBS of magnetic strength the **SAFE-T-STIK mini** easily pulls up **small water valve covers and lids**. No hammer or pry bar needed. Lift out and pull up small steel objects that can cause injuries to workers hands and fingers. This tool is built to lift and pull vertically. **(Not recommended for suspended load control in most situations)**



## FEATURES

- Lightweight & strong
- Designed to Lift/Pull
- Adjustable t-handle or fixed d-handle
- Articulation: 360° rotation, 190° pivot
- Easy to attach & release magnet
- Bright orange color
- Non-slip, abrasion resistant tool handle
- Reflective bands
- Made in USA



## SPECS

**Part # STS003**  
 Length: Fixed, 30"  
 Weight: 4.5 LBS  
 Handle: Adjustable T-handle  
 Magnet Strength: 550 LBS  
 Package Weight: 6 LBS  
 Package Size: 41" x 6" x 6"

## SPECS


**Part # STS003DH**  
 Length: Fixed, 36"  
 Weight: 4 LBS  
 Handle: Fixed D-Handle  
 Magnet Strength: 550 LBS  
 Package Weight: 5 LBS  
 Package Size: 41" x 6" x 6"

U.S. Patent No. 9,975,254



# Magnetic No Touch Safety Tools

For Suspended Load Control, Positioning & Guiding

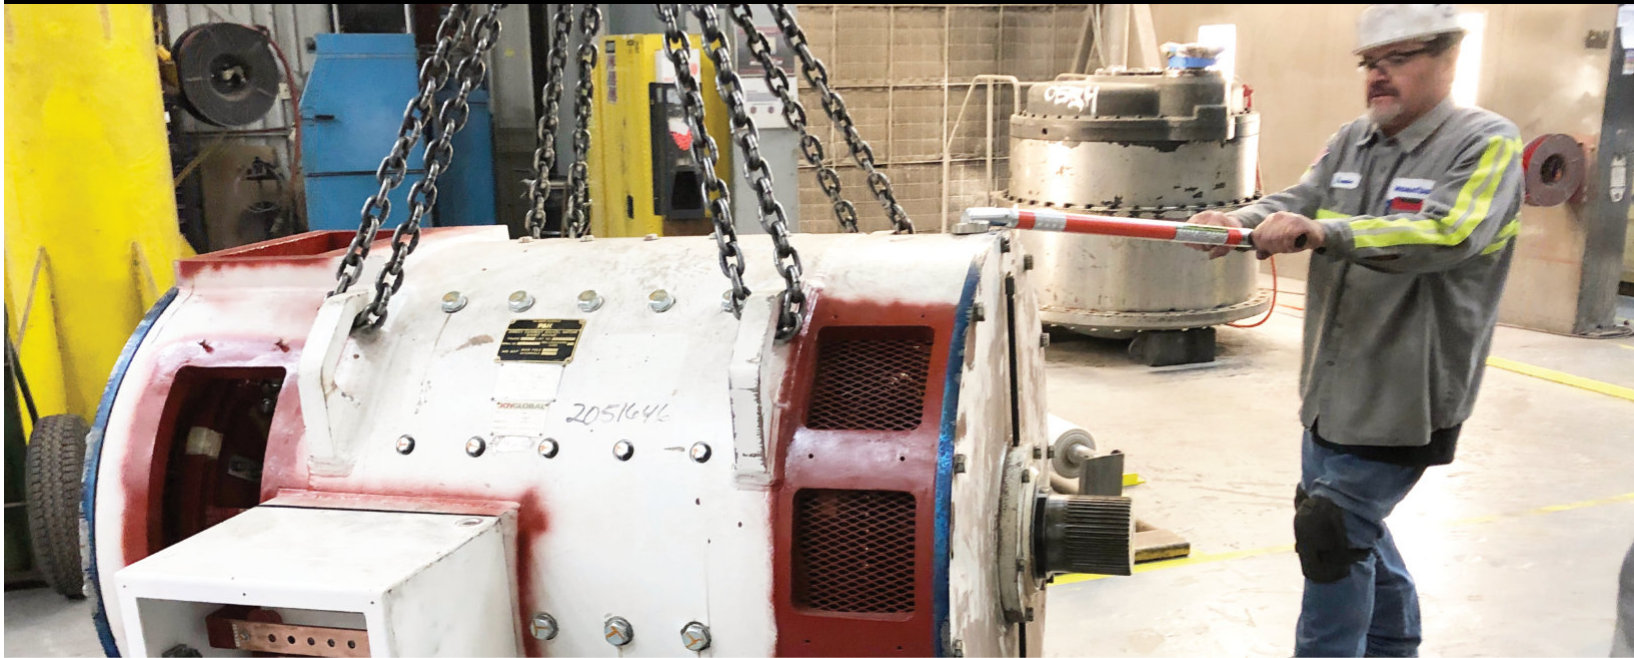

## SAFE-T-STIK SR

A "short reach" model for confined or tight work areas. The SR is great for overhead, gantry or jib crane operators. Easily hold in one hand and control suspended loads. This smaller brother of the SAFE-T-STIK has many possible uses and is a popular choice for steel mills, heavy equipment manufacturing and maintenance.



### SPECS

**Part # STS005**  
Length: Fixed, 30"  
Weight: 4.5 LBS  
Handle: Adjustable T-handle  
Magnet Strength: 550 LBS  
Package Weight: 6 LBS  
Package Size: 41" x 6" x 6"



### FEATURES

- Lightweight & strong
- Rigid, push & pull control
- Adjustable t-handle or fixed d-handle
- Articulation: 360° rotation, 180° pivot
- Easy to attach & release magnet
- Bright orange color
- Non-slip, abrasion resistant tool handle
- Reflective bands
- Made in USA

### SPECS

**Part # STS005DH**  
Length: Fixed, 36"  
Weight: 4 LBS  
Handle: Fixed D-Handle  
Magnet Strength: 550 LBS  
Package Weight: 5 LBS  
Package Size: 41" x 6" x 6"



# Magnetic No Touch Safety Tools

For Suspended Load Control, Positioning & Guiding



## SAFE-T-STIK Lite

A slim, lightweight magnetic load control and positioning tool with less magnetic power and a straight grip. Reduce fatigue and increase the no touch possibilities with Safe-T-Stik Lite.



### FEATURES

- Lightweight & strong push/pull control
- Straight grip handle
- Articulation: 360° rotation, 180° pivot
- Easy to attach & release magnet
- Bright yellow/green color
- Non-slip, abrasion resistant tool handle
- Reflective bands
- Made in USA

*With 270 LBS of magnetic strength, Safe-T-Stik Lite is a good choice for many operations.*


- Less magnet strength
- Smaller magnet size
- Light weight tool

### SPECS

**Part # STS006-32**  
 Length: Fixed, 32"  
 Weight: 3.5 LBS  
 Handle: Straight grip  
 Magnet Strength: 270 LBS  
 Package Weight: 4.5 LBS  
 Package Size: 41" x 6" x 6"

### SPECS

**Part # STS006-52**  
 Length: Fixed, 52"  
 Weight: 4.5 LBS  
 Handle: Straight grip  
 Magnet Strength: 270 LBS  
 Package Weight: 6 LBS  
 Package Size: 41" x 6" x 6"

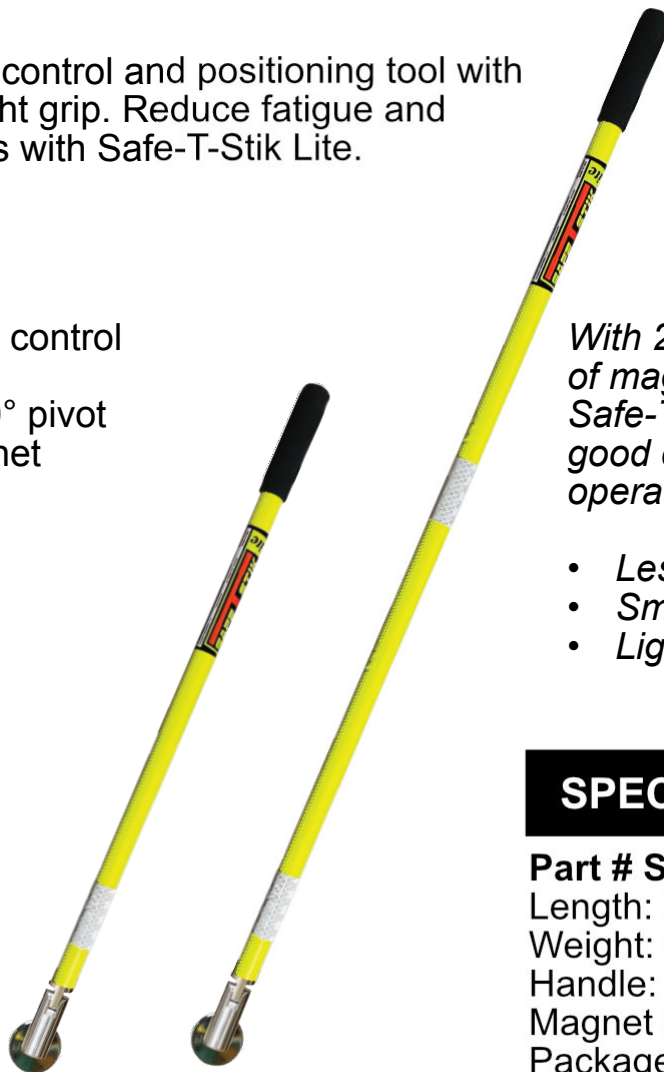


U.S. Patent No. 9,975,254

## SAFE-T-STIK Series Tools (Excludes STS003 & STS003DH)

The applicable products listed below were designed to transmit push and pull forces to a suspended load. The pivot point on these tools is low and offset to the side of the magnet for two reasons, 1 is to provide a low lever point so maximum push and pull forces can be applied and 2 is to allow the user to remove the magnet from an object with minimal force applied to the handle just past the 90° angle. Strong push and pull forces should not be applied within the caution range.

### Push/Pull Load Control & Positioning

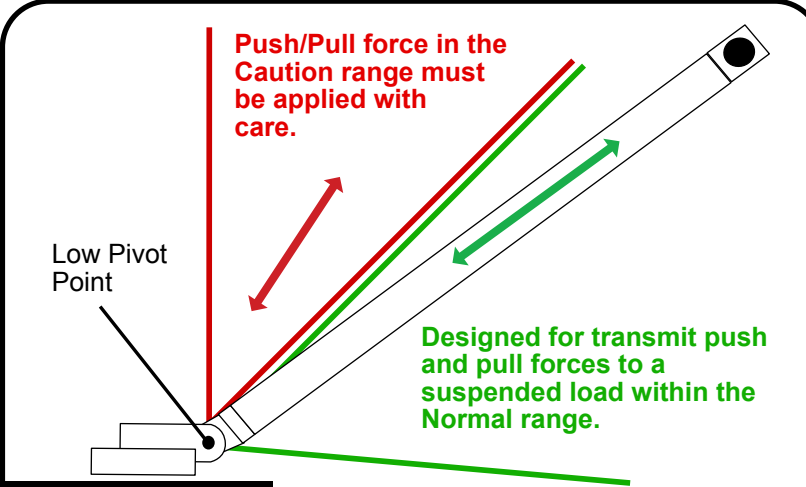

**Push/Pull force in the Caution range must be applied with care.**

**Designed for transmit push and pull forces to a suspended load within the Normal range.**

Low Pivot Point

Steel Object or Surface

The applicable products use a pivot point that is very low. This allows a user to apply maximum push/pull force when the handle angle is within the normal range. To remove the magnet from steel, the user tips the tool handle past 90° and continues to apply pressure to "peel" or "lever" the magnet off of the steel.


The applicable products are designed for push and pull force applied by the user. The force applied by the user is passed directly to the pivot point. As you can see, it is very low to the magnet and at a point where it would be very hard to cause the magnet to disengage when used within the normal range.

**These tools should not be used for lifting.**

### APPLICABLE PRODUCTS:

STS001, STS002, STS005, STS005DH, STS006-32, STS006-52

### PROPER IN USE PIVOT POINT ORIENTATION

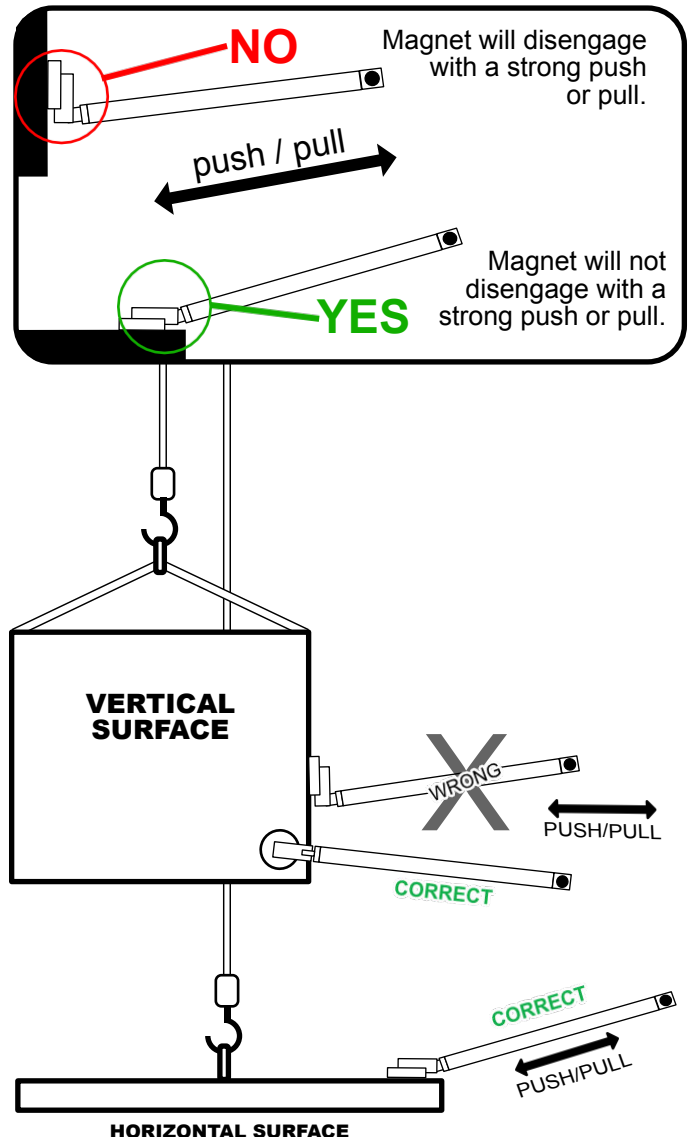

**NO** Magnet will disengage with a strong push or pull.

push / pull

**YES** Magnet will not disengage with a strong push or pull.

**WRONG**

**CORRECT**

**VERTICAL SURFACE**


**HORIZONTAL SURFACE**

PUSH/PULL

PUSH/PULL


#### Attach

Set magnet onto an area of steel that allows good control and keeps user a safe distance away. **NEVER SLAM MAGNET DOWN!**



#### Remove

Tilt handle up past 90° to peel magnet off surface. Then lift away from steel.



## SAFE-T-STIK mini, MULTI-GRAB II & III Series Tools

The applicable products listed below were designed for lifting/pulling and material handling. These products can also be used for suspended load control when the user understands the tool's limitations as it relates to applying push and pull forces. The pivot point designed for these tools is directly over the magnet but is higher up above the magnet and thus results in a slightly bigger lever that can cause the magnet to disengage from steel when strong push and pull forces are applied with the handle in the caution range.

### Designed For Lifting, Pushing & Pulling

**Designed for lifting, pushing and pulling within the normal range.**

**Push/Pull force in the Caution range must be applied with care.**

Higher Pivot Point Above Magnet.

Steel Object or Surface

The applicable products are designed primarily for lifting, pushing & pulling in the normal range. The pivot point is higher than the others and directly over the magnet to help users apply lifting and pulling force perpendicular to a steel object. If used in the normal range, the tool can lift/pull up small steel lids, covers, parts, pieces, scrap etc. If push/pull forces are aggressively applied within the caution range, the magnet could be leveraged off of the steel or become disengaged.

**APPLICABLE PRODUCTS:**  
**STS003, STS003DH, MG002, MG003**

Magnet will not disengage with a strong push or pull. **YES**

Magnet will disengage with a strong push or pull. **NO**

**USE CAUTION!**

**CORRECT**

### MATERIAL HANDLING

**Attach**

slowly or tilt

**Remove**

firm side force pull up and away

**top view**

**side view**

**Max Lift By Hand**  
**40 LBS**  
**18 KGS**





# ADAMAR

## INDUSTRIES

Order by phone: **(888) 232-6275** or email: **ORDERS@ADAMARINDUSTRIES.COM**

Purchase Online at: **ADAMARINDUSTRIES.COM**

© 2020, ADAMAR Industries, LLC. , ALL RIGHTS RESERVED, U.S. Patent No. 9,975,254